

TAP ADAPTERS




ENTER-ANSI Direct Drive Tap Adapter Coolant Thru Extended Range



Features, Application, Ordering:

- ⇒ Compatible with Bilz, Collis, Universal, Lyndex and many other tap holders.
- ⇒ Coolant Thru—Note: Due to the fit between Tap Shanks and the adapter, some leakage may occur.
- ⇒ **LIGHT DUTY USE ONLY!** - Adapter exceeds the recommended range of some tap drivers.
- ⇒ Specials Available Upon Request.

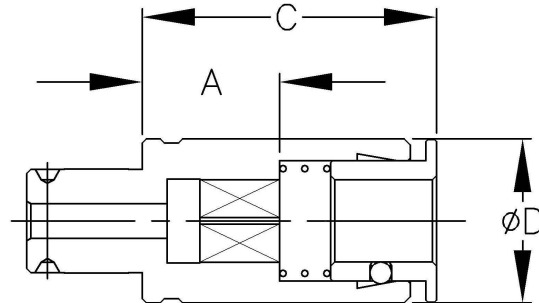

ORDER NUMBER	ADAPTOR SIZE	TAP SIZE ANSI	SHANK DIA	SHANK DIA MM	SQUARE	SQUARE MM	A	C	D
51-010	1	5/8	.480	12.19	.360	9.14	.99	2.19	1.18
51-011*		11/16	.542	13.77	.406	10.31			
51-012*		3/4	.590	14.99	.442	11.23			
51-013*		13/16	.652	16.56	.489	12.42			
51-014*		7/8	.697	17.70	.523	13.28			
51-2040		1/4 PIPE	.563	14.30	.421	10.69	.63	1.45	
51-2060		3/8 PIPE	.700	17.78	.531	13.49	.69		
51-2080		1/2 PIPE	.688	17.48	.515	13.08	.82		
52-015*	2	15/16	.760	19.30	.570	14.48	1.35	3.17	1.88
52-016		1	.800	20.32	.600	15.24			
52-018		1-1/16 & 1-1/8	.896	22.76	.672	17.07			
52-020*		1-3/16 & A-1/4	1.021	25.93	.766	19.46			
52-022*		1-5/16 & 1-3/8	1.108	28.14	.831	21.11			
52-2120		3/4 PIPE	.906	23.01	.679	17.25	1.00	1.78	
52-2160		1 PIPE	1.125	28.58	.843	21.41	1.08		
53-024*	3 Not Shown Set Screw Construction	1-7/16 & 1-1/2	1.233	31.32	.925	23.50	1.90	2.90	2.75
53-026*		1-5/8	1.305	33.15	.979	24.87			
53-028*		1-3/4	1.430	36.32	1.072	27.23			
53-030*		1-7/8	1.519	38.58	1.139	28.93			
53-032*		2	1.644	41.76	1.233	31.32			
53-034*		2-1/8	1.769	44.93	1.327	33.71			
53-036*		2-1/4	1.894	48.11	1.420	36.07			
53-038*		2-3/8	2.019	51.28	1.514	38.46			
53-040*		2-1/2	2.100	53.34	1.575	40.01			
53-2200*		1-1/4 PIPE	1.313	33.35	.984	24.99	1.19	1.65	
53-2240*		1-1/2 PIPE	1.500	38.10	1.125	28.58	1.25	1.65	
53-2320*		2 PIPE	1.875	47.63	1.406	35.71	1.38	2.90	