


TAP ADAPTERS



NTA-ISO 529 / 2283 METRIC Direct Drive Tap Adapter Coolant Thru

Features, Application, Ordering:

- ⇒ Compatible with Bilz, Collis, Universal, Lyndex and many other tap holders.
- ⇒ Coolant Thru—Note: Due to the fit between Tap Shanks and the adapter, some leakage may occur.
- ⇒ ANSI, DIN & JIS Available Upon Request.
- ⇒ Specials Available Upon Request.

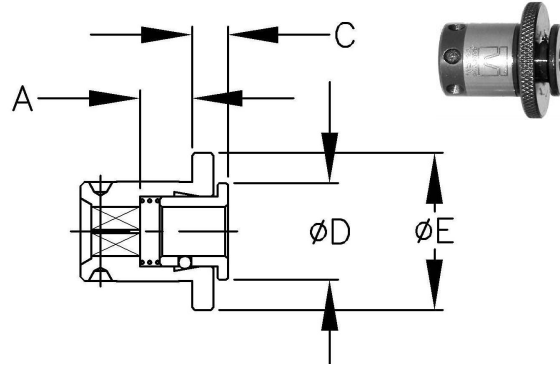

PART NUMBER	ADAPTER SIZE	SHANK DIA	SHANK DIA MM	SQUARE	SQUARE MM	A	C	D	E
51-40355*	1	.138	3.5	.110	2.8	0.39	0.29	1.18	0.73
51-40400*		.157	4.0	.122	3.1				
51-40450*		.177	4.5	.138	3.5				
51-40500*		.197	5.0	.157	4.0				
51-40560*		.220	5.6	.177	4.5				
51-40630*		.248	6.3	.197	5.0				
51-40710*		.276	7.0	.220	5.6				
51-40800*		.315	8.0	.248	6.3				
51-40900*		.354	9.0	.280	7.1				
51-41000*		.394	10.0	.315	8.0				
52-40800*	2	.315	8.0	.248	6.3	0.35	0.29	1.88	0.73
52-40900*		.354	9.0	.280	7.1				
52-41000*		.394	10.0	.315	8.0				
52-41120*		.441	11.2	.354	9.0				
52-41250*		.492	12.5	.394	10.0				
52-41400*		.551	14.0	.441	11.2				
52-41600*		.630	16.0	.492	12.5				
53-41800*	3	.709	18.0	.551	14.0	0.71	0.38	2.75	1.17
53-42000*		.787	20.0	.630	16.0				
53-42240*		.882	22.4	.709	18.0				
53-42500*		.984	25.0	.787	20.0				